

Waterproofing Roof Penetrations

— *New Solutions*

By Lawrence Evensen

A combination of drawings and specifications encompass the requirements for a construction project. Although far more like a technical paper than a novel, these combined documents can in some ways be seen as the concise narrative detailing the design and construction of a project. The goal of the designer is to create comprehensive documents telling the building's "story." Unfortunately, some drawings and specifications leave out so many details that they read more like a Sherlock Holmes mystery, but without the "gotcha" finale to tie up the loose ends. This can be particularly true when it comes to roof penetrations.

In this case, the mystery is what component will provide a watertight assembly for each of the various penetrations shown on the roof plan. Without penetration details and complete specifications, the story is incomplete, and the roofing installer is left to assume unfair responsibilities or attempt to interpret the design team's intention.

An understanding of roof flashings and counterflashings and how they perform their waterproofing tasks is a necessity. This article concentrates on roof penetrations and the methods of installing the aforementioned products and systems to aid in comprehensive roof plans. Following some of the practices suggested in this article should result in a smoother-running construction project.

Specifying Dilemma

The building envelope designer must be extremely diligent when writing the specifications for roofing details, because the results of poor planning are confusion and a higher risk of litigation. A roof membrane is a watertight, nonpermeable cover unless damaged, penetrated, or bypassed. In a perfect world, roofing contractors would not have to deal with complications that typically arise during the construction process, and there would never be any leaks.

A dilemma is created for the design professional when other trades such as electric, refrigeration, structural steel, air conditioning, and other contractors install their products and break the watertight cover in some way. Only clearly written designs directed at each of the trades will place waterproofing responsibility in the hands of the individuals with the expertise and knowledge required to create failsafe waterproof penetration solutions. When the chain of responsibility for waterproofing a roof penetration is not clear, conflicts result, since most subcontractors are concerned with only the equipment or structure they have contracted to produce. It is imperative that subcontractors take responsibility for the roof penetrations they create and start caring about how their work affects the overall building envelope. Only clearly written specifications put the responsibility of proper waterproofing into the contracts of each of the responsible parties. If specifications and details are clearly defined in advance, the roofing contractor is not

placed in the impossible position of creating details for penetrations that are proprietary to the various subtrades. Closing this gap goes a long way toward keeping water from bypassing the monolithic roof cover and keeps the lawyers at bay.

Flashing Basics

Over the centuries, roof construction has evolved to include two waterproofing techniques: flashings and counterflashings. These materials create a rise in the roof's membrane high enough to keep the elements from entering the waterproofing membrane, with a cover over the rise.

The roof-rise feature, or flashing, facilitates water runoff as long as weather conditions are not extreme enough to overflow the rise. The cover of the flashing or counterflashing is designed to allow water to shed over or around the flashing opening. There are many classes of roof flashings and counterflashings, including those products specifically designed for:

- Bases,
- Chimneys,
- Copings,
- Eaves and fascias,
- Valleys, and
- Roof penetrations.

For each class of flashing, the law of gravity and the rules of physics for the water's flow are the same. The roof flashing is constructed to rise higher than the highest expected water level from a weather event and is counterflashed to cap its open-

ing, allowing gravity to direct water away.

Potential Problems with Penetration

Flashings for roof penetrations, projections, and equipment stands are designed with the flashing/counterflashing methodology. Pipes, conduits, vents, and support legs use a sleeve or “jack” flashing to create the rise in the roof’s level.

As a general rule of thumb, roofing product manufacturers follow the guidelines of the National Roofing Contractors Association’s (NRCA) *Roofing and Waterproofing Manual*. In the third edition of its “Handbook of Approved Roofing Practices,” Sections 1 and 2 recommend using a metal flashing or inserting roof jacks into the membrane for projections through the roof’s membrane no lower than 203 mm (8 in), and no higher than 356 mm (14 in) above the finished roof level on low-slope roof applications. In the 2007 *Roofing and Waterproofing Manual*, the verbiage has been replaced by a detail drawing. The notes on the detail include the following: “Penetration pockets are not the preferred flashing method at the penetrations because they may be a constant maintenance problem.” (See *Figure 1*.)

Steep-slope roof applications can have a rise as minimal as 63.5 to 76 mm (2.5 to 3 in), since the grade virtually guarantees that a water event will not be high enough to overflow the flashing, even in extreme weather conditions.

Many penetrations through a roof covering can be waterproofed using the respective manufacturer’s standard details. Round penetrations—such as plumbing vents, electrical conduits, HVAC chiller lines, domestic water lines, and natural gas pipes—can be matched to a pipe flashing jack with the proper outside diameter. Nearly all designers call out a flashing method at these locations.

It is the responsibility of the general contractor to ensure the appropriate installer provides properly sized flashing for each of the roof penetrations on a project. However, when the roof penetration is not a standard round ge-

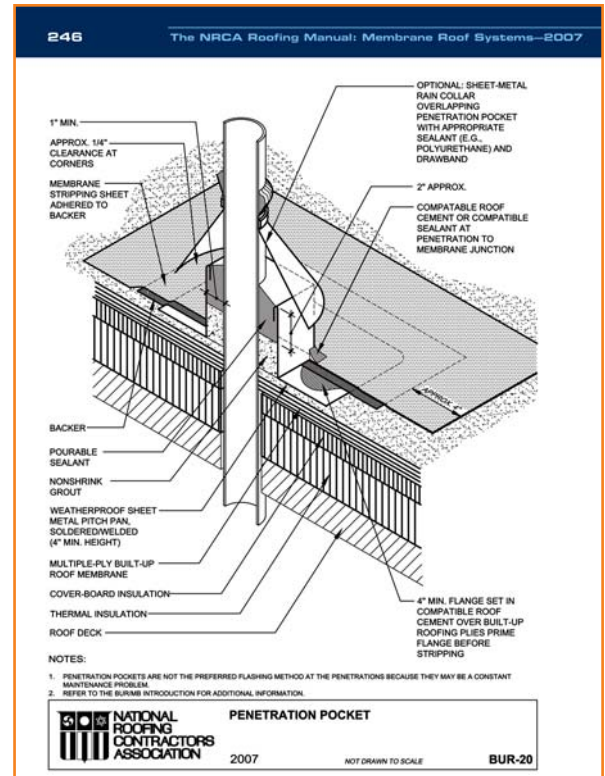


Figure 1 – NRCA penetration pocket drawing.

try or is not detailed on the drawings, or when subcontractors do not provide the





UNITED COATINGS
LONGEVITY BY DESIGN[®]
A Subsidiary of Quest Specialty Chemicals[™]

- Providing superior coating solutions since 1919
- 750 million square feet of roof coatings worldwide
- Nationwide factory approved contractors & distributors
- Wide range of coating solutions for virtually any roof

800 / 541-4383 or 509 / 926-7143
www.unitedcoatings.com





TESTED PROVEN TRUSTED



Kymax is a tough, enamel-like finish that resists abrasion, biological growth, dirt, oil and all types of weather extremes.

- Low-Build Fluoropolymer Roof & Wall Coating
- Ultimate Reflectivity
- Ultimate Color Stability
- Ultimate Weather Resistance





Photo 1 – Front of St. Luke's Outpatient Center.

necessary flashing as part of their work, the roofing professional is forced to create a waterproofing detail on the fly. This is complicated by the great variety of structures and mechanical devices used on a roof.

For example, many structures have equipment located on the roof. For safety or aesthetic reasons, this equipment is often hidden behind screens. The screens are built out of very solid materials (e.g., structural steel) to ensure the capability to withstand high wind loads. It is not unusual for equipment screens to employ several hundred roof penetrations made from square, angle-iron, or H-beam steel. The use of non-round steel support structures at these locations makes standard details difficult to write, creating a problem for the roofing contractor that can be especially complex to solve.

Help From Above for St. Luke's

To better understand the need for clarity in waterproofing specifications, it can be useful to see the lessons learned from a previous project. St. Luke's Outpatient Center is a new medical facility located in St. Louis, Missouri (see *Photo 1*). In late 2007, Ryan Freeman, the job superintendent of McCarthy Building Companies, discovered the roof details provided by the roofing material's manufacturer were inadequate. He was faced with 120 steel support posts (102 or 152 mm [4 or 6 in] tall) that were part of the equipment screen. If the posts were improperly waterproofed, the leaks would have been numerous.

The flashing detail included a site-fabricated flashing to be created by the roofing crew out of the white, single-ply roof product. The plan was to make the flashing, seal the top edge against the steel post, and

draw it tight using a stainless-steel band clamp. The problem with this technique is that no matter how much torque is applied to the clamp, there will be loose gaps on the flat part of the square post. Square pegs do not fit in round holes.

In search of a better solution, Freeman contacted RNC Enterprises' Ron Carter, a local technical advisor for innovative construction products. Carter suggested


installing storm collars over the field-fabricated flashings to provide the waterproofing that each square post required. (NRCA approves storm collars for this design purpose.) The steel support posts had already been installed, so any counterflashing would need to be a retrofit design.

Choosing the appropriate product was the next challenge. Any storm collar used for these posts had to fit certain design criteria. The storm collar needed to be:

- A retrofit design (as the equipment screen posts had already been installed),
- Installed using the existing roofing crew labor,
- Made of a material compatible with the metal posts, without worry of corrosion to the post or structure,
- Free of sharp edges,
- Able to spring back into place in the event of disturbance by workers or pedestrians walking on the roof, and
- Aesthetically in line with the building's white roof covering.

Additionally, the storm collars had to have a life expectancy of at least 20 years, the intended duration of the roof.

Carter used retrofit storm collars made of ethylene propylene diene monomer (EPDM) rubber as the counterflashing. By ordering these products with square cut-outs sized exactly to match the metal posts, he ensured that the storm collars were suitable for the field-fabricated roof detail. There were neither corrosion compatibility issues nor sharp edges. Further, if the rubber is impacted by pedestrian traffic, it bends and springs back automatically. Installed using a simple nut driver, the "off-the-shelf" collars can open up to wrap

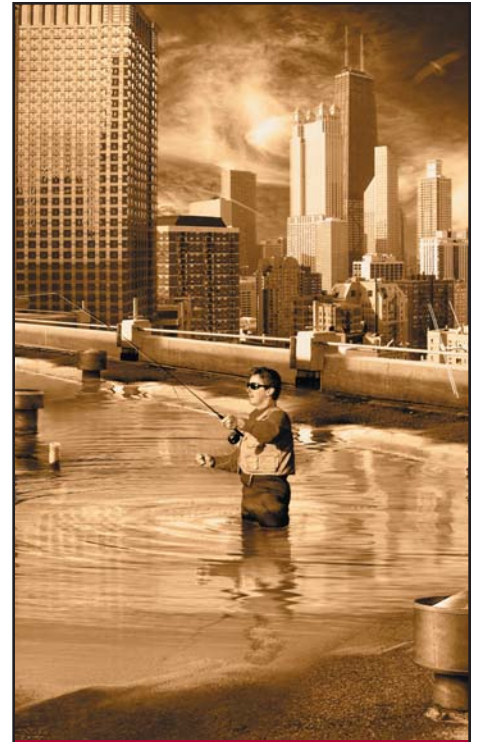

Coal Tar:
First Choice for Flat Roofs
Durapax:
First Choice in Coal Tar

Roofing contractors & specifiers choose Durapax coal tar roofing systems.

- Coal tar roofing provides low cost and long life (25+ years)
- Many coal tar roofs last more than 50 years
- Coal tar's cold flow properties provide self-healing
- Superior technical & customer support
- Delivery you can depend on
- Comprehensive warranties
- UL & FM approved systems

Specify your next flat roof with a Durapax coal tar roofing system.

610.579.9075

Durapax.com

DURAPAX
COAL TAR
COMMERCIAL ROOFING SYSTEMS



Photo 2 – Trammell Crow Residential project in Pasadena, California, seen from the air.

Walnut Street and Colorado Boulevard in the city of Pasadena, California, provide another example that illustrates how a common problem can be solved. The project includes 265 dwellings that are cooled using individual split central air-conditioning systems. (See Photo 2.)

A split system is made up of two copper refrigerant tubes that are connected to an indoor coil and an outdoor condenser heat-pump unit. The smaller of the lines is called a liquid line and the larger, a suction line. The lines are filled with a chemical refrigerant, which has a boiling point low enough that it evaporates at relatively low temperatures and takes heat and moisture out of the air as it passes through a coil that is installed inside each apartment dwelling. The refrigerant travels in

around myriad geometric shapes while creating the rise in roof level needed.

technique, one can write almost all other odd or difficult roof penetration waterproofing specifications.

A/C Specifications Are Not Always Cool

By utilizing the same roof rise and cover

The luxury apartments built by Trammell Crow Residential at the corner of

a closed loop between the coil and the rooftop condenser.

In addition, a low-voltage wire inside a watertight conduit provides an electrical connection from the coil to the outdoor condenser. The two tubes and conduit combination creates a tightly grouped roof penetration called a “line set.” (See Photos 3 and 4.)

The 265 heat-pump condenser units on the Trammell Crow project were mounted on platforms located on the flat areas of the multistory buildings’ roofs.

Line sets are a prime source of water intrusion, because it is extremely dif-



Photo 3 – Closeup of a line set at the Trammell Crow project.



Photo 4 – Split central air-conditioning units on the Trammell Crow roof.

RCI 2009 DOCUMENT COMPETITION

Now Easier and More Rewarding

In addition to the traditional winners’ plaques and *Interface* publicity, the 2009 Document Competition Committee will award cash vouchers to nine winners in three categories:

LARGE PROJECT | SMALL PROJECT | REPORT

1 st Place winners	300 RCI Dollars
2 nd Place winners	150 RCI Dollars
3 rd Place winners	50 RCI Dollars

RCI Dollars will be redeemable for any product or service provided by RCI or the RCI Foundation. RCI Dollars are redeemable by the award winner or by anyone specifically designated by the award winner. Use your winnings for yourself or to help a friend or colleague buy a reference book or attend a seminar.



See What it Takes to Get Involved

www.rci-online.org/document-competition.html

RCI, Inc. 800-828-1902

difficult to seal between the groups of tubes. As a further complication, the large suction-line tube is always insulated with soft foam as an energy conservation measure. Water that gets inside the insulation follows the tube like a highway through the walls of the building, ultimately creating leaks in apartments. The Walnut Street project had first-floor apartments five stories below the roof decks, so a leak at the ground floor could create hard-to-identify, longterm problems. Line sets need to be waterproofed!

EPDM storm collars again offer ideal solutions for this roof penetration problem. In this case, the rise in the roof level was created using a standard 37-mm to 50-mm (1.5-in to 2-in) diameter lead-pipe flashing jack and covering the rise with an EPDM-molded storm collar. The factory-made storm collars are pre-engineered to accept three closely grouped tubes and include two

20-mm (7/8-in) and one 10-mm (3/8-in) nipple holes. When the three independent components of the line sets pass through nipples molded into the rubber collar, each is separated and secured by a stainless-steel hose clamp. A bonus of using rubber is that the assembly has no bimetal contact and zero corrosion potential. (See *Photos 5 and 6*.)



Photo 5 – Worker with 12-inch collar on equipment screen footer.



Photo 6 – Close-up of 6-inch, angled storm collar.

After demonstrating the storm collars to the roof consultant and roofing manufacturer's technical team, Joe Daniels, owner of D7 Consultants, Newport Beach, CA,

TuffWrap has pioneered and perfected dust and debris containment during roofing, renovation and reconstruction. Our customized barriers are the toughest and most versatile in the industry. And our unique installation process ensures a safe and spotless work environment. Best of all, when the project is finished, clean-up is simple.

With TuffWrap Installations, companies:

- maintain their business operations
- prevent damage to equipment and inventory
- protect employees from contaminants

So when you need a world of protection, think TuffWrap.

Call us today at **1-800-995-4556** or email us at info@tuffwrap.com

**The Industry Leader in
Dust & Debris Containment Installations**
www.tuffwrap.com

If you wanna protect your customers, you gotta get **Tuff**.



TuffWrap
Keeping the mess where it belongs

said, "These provide a simple solution to a common problem we find on the roofs we work on. Let's use them." The storm collars were approved.

A plan was put in place to have each line set enter the building through lead-pipe flashings, each with 200-mm- (8-in) high risers that were installed into the roof system following the manufacturer's standard construction details. The roof installed was a CertainTeed specification number N-N-B5, 5-ply, built-up, smooth-surfaced roof installed over a protective layer of rosin sheet. Because the team used CertainTeed installation details CT-11 or CT-12, the roof flashings were installed in a watertight manner, and the result was a specification that allowed issuance of the manufacturer's 20-year warranty.


After the roof jack flashing had been completely installed, the rubber storm collars were placed down onto the copper tubes by way of the premolded nipples. The storm collars were located over the already installed lead flashings, and the stainless-steel hose clamps on each of the three nip-

ples permanently secured the storm collars as covers over each flashing. Line set storm collars created a waterproof counterflashing umbrella for any type of pipe jack, keeping the water on the roof.

Conclusion


The NRCA recommends metal flashing or roof jack insertion into the membrane for projections between 203 and 356 mm (8 and 14 in) above the finished roof level. These flashing jacks can be fabricated from many classes of materials, including lead, steel, aluminum, and even single-ply materials. (The material used is often determined through manufacturer preference, design/

construction professional experience, compatibility, aesthetics, and cost.) All that is required is a storm collar that attaches to the penetration or group of penetrations, which acts as the counterflashing atop the flashing jack.

The installation of retrofit and standard storm collars to solve these waterproofing problems is an example of how innovative products can improve roof penetration details. By adding storm collars to the roof plan, each penetration becomes manageable, taking the mystery out of inadequately written details. 

Lawrence Evensen

Lawrence Evensen is the president of All Style Industries, a manufacturer of storm collars and flashings. Evenson holds four U.S. patents for rotational roof flashings and waterproof roof deck post construction. He is a member of RCI and was formerly a roofing contractor in California for over 20 years. He may be reached at allstyle@spinflashing.com.



WATCH THE ROOF GROW

Want to watch a green roof change? Go to <http://greenroof.viewnetcam.com/> to view a live telecast of a "living roof." A webcam installed on the Unicorn Grocery in Manchester, England,



features a natural wetland pond area on top of the roof. Viewers can watch the plants and animals the roof has been designed to attract. The Permanite living roof system was installed by Paragon Roofing & Asphalt Ltd. of Bradford and was completed in four weeks. Since installation of the roof in 2007, over 36 species of birds and insects, including the rare Yellow Wagtail, have been monitored by environmental scientists.

— Roofingmag.com

Roof Repairs Caused Universal Studio Blaze

Studio crew workers reportedly using a blowtorch – probably to heat a polymer-modified bitumen membrane on a roof – accidentally set off the fire that destroyed a two-block area of the Universal Studios Hollywood back lot on June 1, according to authorities. The blaze wiped out a courthouse square set that had appeared in "Back to the Future" and "To Kill a Mockingbird," as well as the popular "King Kong" attraction featured in the Universal Studios Theme Park tram tour of the back lot. More than 400 firefighters battled the flames, with ten individuals slightly injured. The workers had apparently finished applying the shingles at 3 a.m., stood watch for an hour per company policy, and then left. A security guard noticed flames about 45 minutes later and called the fire department.

AUSSIES MAKE MASSIVE SOLAR MODULES

Solar Systems Generation Pty. Ltd., Melbourne, Australia, is poised to construct a 154-MW solar power station in the northwest corner of Victoria using Heliostat Concentrator Photovoltaic technology. The project should generate 270,000 MW-hours per year by 2013. The project is being partially financed by a \$71.5 million federal grant and a \$47.7 million state grant.

Approximately 20,000 heliostats (sun-tracking mirrors) will focus light on 250 receivers housing 63,000 photovoltaic modules. The photovoltaic (PV) cell arrays were developed by Spectrolab Inc., a wholly-owned Boeing Co. subsidiary, for use in NASA space missions.

The CS500 dish has a PV area of only .23 sq m, whereas traditional flat-plate dishes would use about 350 sq m, officials report.

— ENR